



RIGID POCKET FILTERS PTL AND PHL

- **100% SYNTHETIC, CORROSION-FREE AND HUMIDITY-RESISTANT**
- **FLAMMABILITY CLASSIFICATIONS AS PER U.S. UL 900, CLASS 2 AND DIN 53438, CLASS K1/F1**
- **FILTER RANGE INDEPENDENTLY TESTED**

DESCRIPTION

Filtrair manufactures its own thermally bonded synthetic medium for their PTL and PHL rigid pocket filters. The depth-loading medium is manufactured in a progressive density multi-layering technique to ensure high dust holding capacity with lowest pressure drop. For the user, this results in long filter life and low energy and maintenance costs.

The pocket filter medium is inherently rigid, with a welded rib construction to form a pocket with the highest possible function security in even the most brutal air pressure and high dust-laden environments.

PTL and PHL rigid pocket filters are metal free and thus do not corrode, can be incinerated and withstand 100% humidity environments with ease.

FEATURES AND BENEFITS

- **AERODYNAMIC** wedge-shape, tubular **POCKET SPACERS** - minimum air flow resistance, maximum turbine output
- **POCKETS** integrated in injection moulded, impact-proof PU header - gives filter a burst strength of < 24 "w.g.
- **UNIQUE** proprietary Filtrair filter medium - providing maximum dust holding capacity
- For **ALL TYPES OF ENVIRONMENTS**: high dust, moisture and water mist content as well as high velocity
- **SELF SUPPORTING**, leak-free welded pockets - stay rigid in turbulent airstreams - eliminate shedding
- **FILTRAIR PTL/PHL** filters may be disposed of by incineration

APPLICATIONS

Filtrair PTL rigid filters serve as very efficient pre or final filters in air intake systems of combustion engines, industrial plants and in all HVAC applications. Filtrair PTL is suitable for filtration in any environmental condition - including offshore, marine - and in any climate - including tropical (high humidity). They efficiently remove fine airborne particulate matter but also mist and fog. Where subsequent final filters are placed, they protect them from coarser dust, salt and fog, thus significantly prolonging their life and increasing their operational safety.

Filtrair PHL rigid filters serve as highly efficient pre-filters in air intake systems of combustion engines, industrial plants and in all HVAC applications. They are suitable for filtration in any environmental condition - including offshore, marine - and in any climate - including tropical (high humidity). They efficiently remove fine, submicron airborne particulate matter but also mist and fog. They protect subsequent high efficiency filters from fine dust and fog, thus significantly prolonging their life and increasing their operational safety.

RIGID POCKET FILTERS PTL AND PHL


TECHNICAL DATA

Filter type	Unit	PTL	PTM	PHL
Rated air flow (1/1 size)	cfm	2000	2000	2000
Initial pressure drop at rated air flow (2000 cfm)	"w.g.	0,24	0,28	0,39
Initial pressure drop at rated air flow (2500 cfm)	"w.g.	0,33	0,44	0,47
Recommended final pressure drop	"w.g.	1,80	1,80	1,80
MERV* ASHRAE 52.2.2012	-	8	8	12
Average Arrestance	%	98.5	99	>99
Dust holding capacity (Ashrae dust) 1.5 "w.g.	g/unit	1100	1000	1212


PRODUCT GEOMETRIES

Product Geometries	Unit	PTL 1/1	PTL 5/6	PTL 1/2	PTM 1/1	PTM 5/6	PTM 1/2	PHL 1/1	PHL 5/6	PHL 1/2
Filter dimensions	"	23.43*23.43	19.43*23.43	11.39*23.43	23.43*23.43	19.43*23.43	11.39*23.43	23.43*23.43	19.43*23.43	11.39*23.43
Filter length	"	24.4	24.4	24.4	20	20	20	24.4	24.4	24.4
Filter medium area	ft ²	60	38	30	51	31	26	60	38	30
Nr. of pockets	-	8	5	4	8	5	4	8	5	4
Filter weight	lb	6.4	4.9	3.7	5.7	4.2	3.1	7.7	5.2	4.0
Package - nr of filters per box	unit	2	2	2	2	2	2	2	2	2
Suitable for standard mounting frame	"	24*24	20*24	12*24	24*24	20*24	12*24	24*24	20*24	12*24
Maximum continuous working temperature	°F	≤ 160	≤ 160	≤ 160	≤ 160	≤ 160	≤ 160	≤ 160	≤ 160	≤ 160
Admissible relative humidity	%	100	100	100	100	100	100	100	100	100
Maximum final operating pressure drop	"w.g.	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4	2.4
Burst pressure drop	"w.g.	>24	>24	>24	>24	>24	>24	>24	>24	>24
Options available on request	Gasket on downstream, on upstream side or on both sides									

PRESSURE DROP vs AIR VOLUME

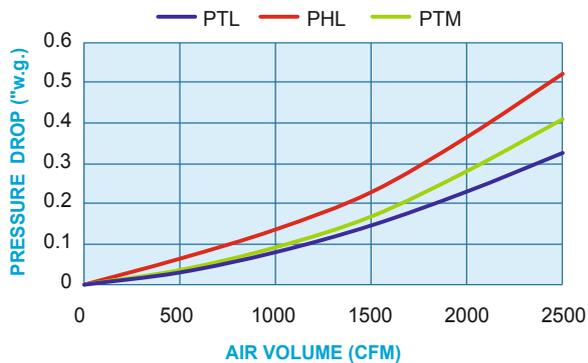

EFFICIENCY vs PARTICLE SIZE

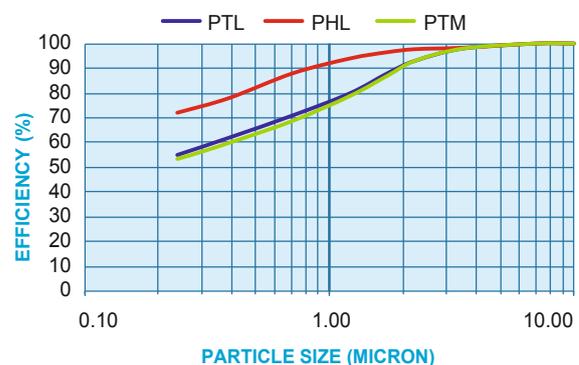

All data are average indicative values with usual manufacturing and testing tolerances. We reserve the right to modify performance data without prior notice. Specific performance data will require our written confirmation. Filtrair® is the registered trade mark of Filtrair bv.

