

## Filter media

### DRG 5N

Stainless steel wire mesh 1.4404


#### 1. Features

A special form of surface treatment has been used to obtain a very smooth, finely separating filter media. The wire mesh structure of DRG 5N permits wet cleaning without removing the cartridge.

This media is preferred for use in cleanable dust filters installed in dry dust removal applications in the food processing and pharmaceuticals industries.

#### Characteristics

- Smooth surface
- Electrically conductive
- Good separation efficiency
- Excellent cleaning power
- Good cleanability
- Worldwide distribution

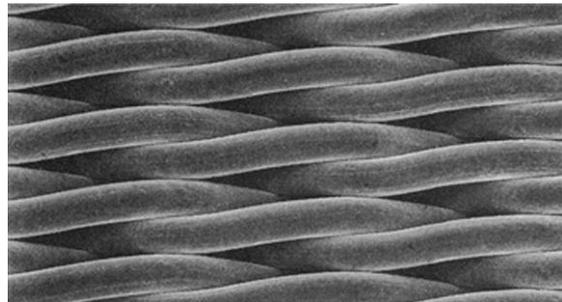


## 2. Technical data

Type	Media	Media thickness [mm]	Weight [g/m <sup>2</sup> ]	Air permeability [m <sup>3</sup> /m <sup>2</sup> h]	max. operating temperature [°C]
DRG 5N	Stainless steel wire mesh 1.4404	0.15	750	900 at Δp 200 Pa	240 (permanent) max. 260 (peaks)

Technical data is subject to change without notice!

## 3. Filtration efficiency

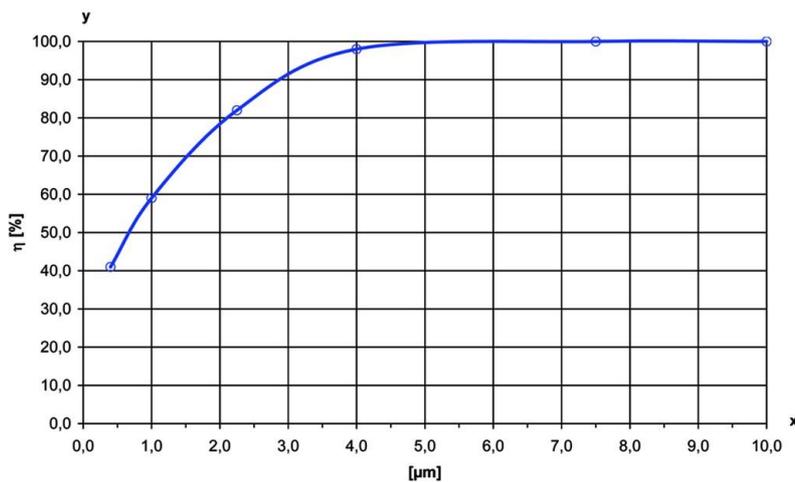

Filtration efficiency : > 98 %  
at 5 μm

Test conditions  
Filter surface load: 3.36 m<sup>3</sup>/m<sup>2</sup>\*min  
Mass concentration: 200 mg/m<sup>3</sup> Dolomit  
Test dust: DRB 20 (Rock flour)

Electrical resistance: < 4 x 10<sup>4</sup> Ω

x = Particle size [μm]  
y = Filtration efficiency η [%]

These values may vary depending on the nature of the dust, the composition of the gas and the cartridge design.

## 4. Chemical resistance/mechanical properties

Chemical resistance				Mechanical properties			
	Very good	Good	Limited		Very good	Good	Limited
Humidity	x			Surface quality (smoothness)	x		
Hydrolysis	x			Stability			x
Acids		x		Abrasion resistance		x	
Alkalis	x			Cleanability (jet pulse)		x	
Solvents	x			Washability	x		

These properties are of purely qualitative valuation and depending on the nature of the dust, the composition of the gas and the operating conditions (e.g. temperature).

## 5. Design

Please contact us for detailed technical information, any open questions and for general expert advice. Completion of the relevant questionnaire would facilitate in the coordination of all important parameters. Comprehensive documentation on our product range, cleaning units and cartridges can be provided.

Filtration Group GmbH  
Schleifbachweg 45  
D-74613 Öhringen  
Phone +49 7941 6466-0  
Fax +49 7941 6466-429  
industrial.sales@filtrationgroup.com  
industrial.filtrationgroup.com  
70341997.03/2020  
Filter media DRG 5N