

Filter media

Ti 69

Polyester fleece, oil and water-repellent

1. Features

Ti 69 is a specially optimised polyester (PET) filter media offering improved filtration efficiency in combination with high air permeability. Its excellent cleaning properties are the outcome of an oil and water-repellent finishing.

The media owes its remarkable stability to the thermoplastic solidification process. No binders are used.

Characteristics

- Oil and water-repellent finishing
- High mechanical strength
- Smooth surface
- Excellent cleaning properties
- Resistant to a large number of chemicals
- Thermoplastic bound, no binding agent
- Compliance with the requirements of DIN EN 60335-2-69/Dust class "L"
- Worldwide distribution




2. Technical data

Type	Media	Media thickness [mm]	Weight [g/m ²]	Air permeability [m ³ /m ² h]	max. operating temperature [°C]	Test certificates/ dust classes
Ti 69	Polyester fleece, oil and water-repellent	0.76	285	635 at Δp 200 Pa	130 (permanent) 150 (peaks)	DIN EN 60335-2-69 "L"

Technical data is subject to change without notice!

3. Filtration efficiency

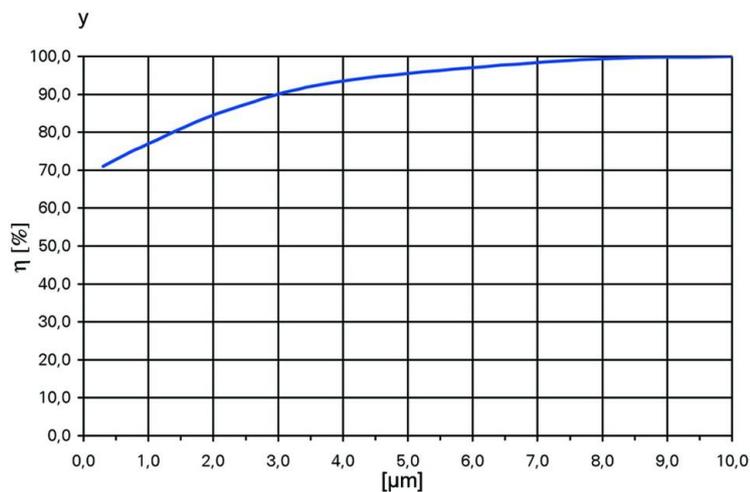

Filtration efficiency: > 98 %
at 5 μm

Test conditions
Filter surface load: 3.36 m³/m²*min
Mass concentration: 200 mg/m³
Test dust: Dolomit DRB 20 (Rock flour)

x = Particle size [μm]
y = Filtration efficiency η [%]

These values may vary depending on the nature of the dust, the composition of the gas and the cartridge design.

4. Chemical resistance/mechanical properties

Chemical resistance	Chemical resistance				Mechanical properties	Mechanical properties		
	Very good	Good	Limited			Very good	Good	Limited
Humidity		x			Surface quality (smoothness)	x		
Hydrolysis			x		Stability	x		
Acids		x			Abrasion resistance	x		
Alkalis			x		Cleanability (jet pulse)	x		
Solvents		x			Washability		x	

These properties are of a purely qualitative valuation and depending on the nature of the dust, the composition of the gas and the operating conditions (e.g. temperature).

5. Design

Please contact us for detailed technical information, any open questions and for general expert advice.
Completion of the relevant questionnaire would facilitate in the coordination of all the important parameters.
Comprehensive documentation on our product range, cleaning units and cartridges can be provided.

Filtration Group GmbH
Schleifbachweg 45
D-74613 Öhringen Phone
+49 7941 6466-0
Fax +49 7941 6466-429
Industrial.sales@filtrationgroup.com
industrial.filtrationgroup.com
70342023.03/2020
Filter media Ti 69